

Giada F200

Ultra Compact Mini PC for Entry Level Media Player



Features

- ◆ Intel® Baytrail-M Processors
- ◆ Onboard 2GB DDR3L Memory
- ◆ 1 x HDMI
- ◆ 1 x mSATA, 1 x TF Card Reader
- ◆ 1 x USB3.0, 2 x USB2.0
- ◆ 1 x RJ45, 1 x Mini-PCle for WiFi/BT/3G/4G, 1 x SIM Slot




Specifications

RoHS CE FC CCC


		F200
Processor	CPU	Intel® Celeron N2807
	Frequency	1.58 GHz (Up to 2.16 GHz)
	BIOS	AMI Source Code
	Chipset	SOC
Memory	Type	DDR3L-1333MHz
	Socket	Onboard
	Max Size	2GB
Graphics	GPU	Intel® HD Graphics
	Graphic Engine	DirectX 11.1, OpenGL 3.0, OpenCL 1.1, OpenGL ES 2.0
	HDMI	1 x HDMI (Max. 1920 x 1080 @60 Hz)
Network	Controller	Realtek RTL8111F Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	1 x USB 3.0, 2 x USB 2.0
	Display Interface	1 x HDMI
	LAN	1 x RJ45
	Audio	1 x 2-in-1 Headset (MIC-IN & AUDIO OUT)
	Mini-PCle#1	1 x Full-size Mini-PCle for mSATA
	Mini-PCle#2	1 x Full-size Mini-PCle for WiFi/BT/3G/4G
	SIM	1 x SIM Slot
	JAHC Switch	1
Storage	mSATA	1 x Full-size mSATA
	Card Reader	1 x TF Card Reader
JAHC Tech	WatchDog Timer	0-255 Second Time Out Support
	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
	Remote Control	By IR Controller for Power On
Operation System	Windows	Windows 7/8.1/10
	Linux	Supported
Power	Power Type	DC-IN
	Power Adapter	12V/2A

F200


Mechanical	Dimensions (W x D x H)	116.6mm x 107.2mm x 30mm
	Fanless	Yes
	Construction	Metal
	Mounting(Optional)	Desk/Wall Mounting and VESA Mounting Kit (JT NUC-JC530)
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C (32 °F ~ 104 °F) at 0.7m/s Air Flow
	Storage Temperature	-20°C ~ 60°C (-4 °F ~ 140 °F)
	Relative Humidity	95% @ 40°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

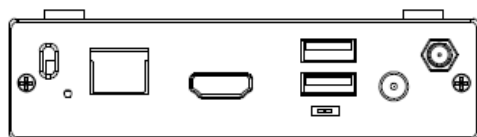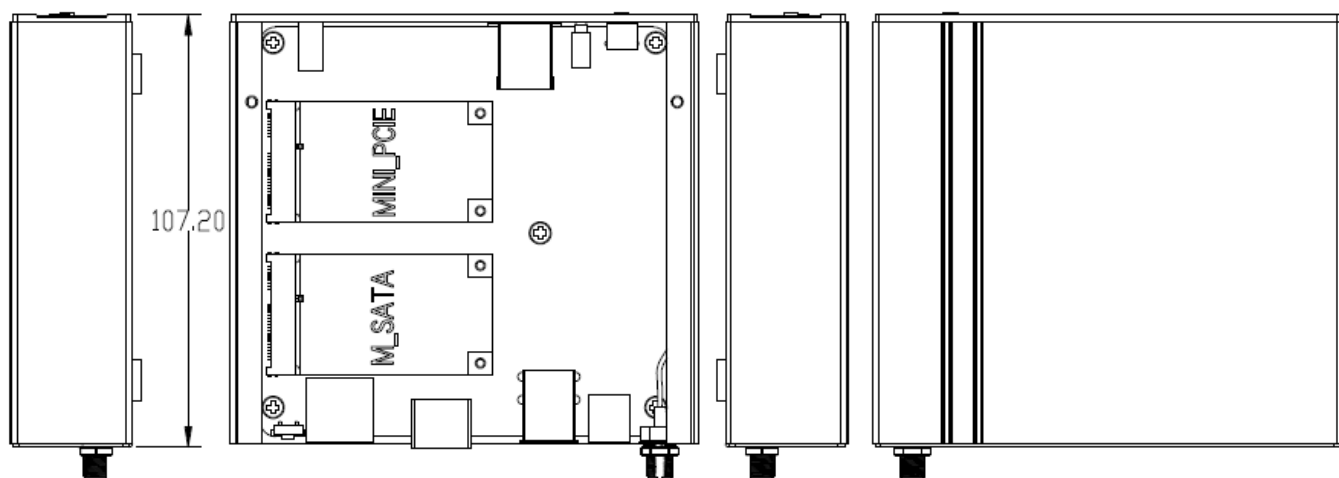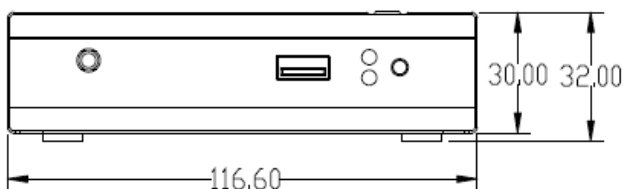

Front Panel External I/O

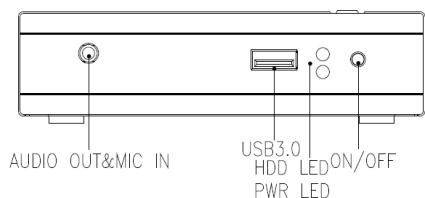

Rear Panel External I/O

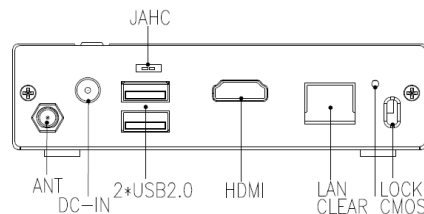

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.

versions: V1.0